

การ Check Version PBX

PBX – 1. Slot – System property – Site

Main	VoIP-DSP Options	Port Number	LAN Status	Media Relay	SIP Extension	Echo Cancellation	DSP Conference
Site Name	: NS300						
Location(MIB)	:						
PBX Region	: ประเทศไทย						
IP Address	: IP MPR 192.168.0.220						
MAC Address	: 00:80:F0:4D:52:5C						
PBX Version	: PBX Version 001.00135						
Data Version	: 0001.0000						
SRAM Version	: 000						
System Up Time	: 0 days 2 hours 58 minutes						
Storage Memory Size	: 2G						
Area ID for logical partition	: 1						
P2P Group	: 1						
P2P Group Name	:						
IP Terminal Registration Mode							
<input type="radio"/> Manual <input type="radio"/> Full Automatic <input checked="" type="radio"/> Extension Input							

*) Perform System Reset for changes to take effect

Version Card

PBX – 1. Slot – System property – Slot Summary

System Property - Slot Summary

Refresh Close


Physical Shelf Virtual Shelf

No.	Shelf	Slot	Card Type	Status	Version
	ALL			ALL	
1	1	1	LCOT6	INS	
2	1	2	DLC2	INS	
3	1	3	MCSLC16	INS	
4	1	4	PRI30	INS	
5	1	5		IDLE	
6	1	6	DHLC4	INS	000.006
7	1	7		IDLE	
8	2	1	MCSLC16	INS	
9	2	2		IDLE	
10	2	3		IDLE	

การ Up Version PBX



System Control – 1. Program Update – 1. Download Program File – 1. Manual

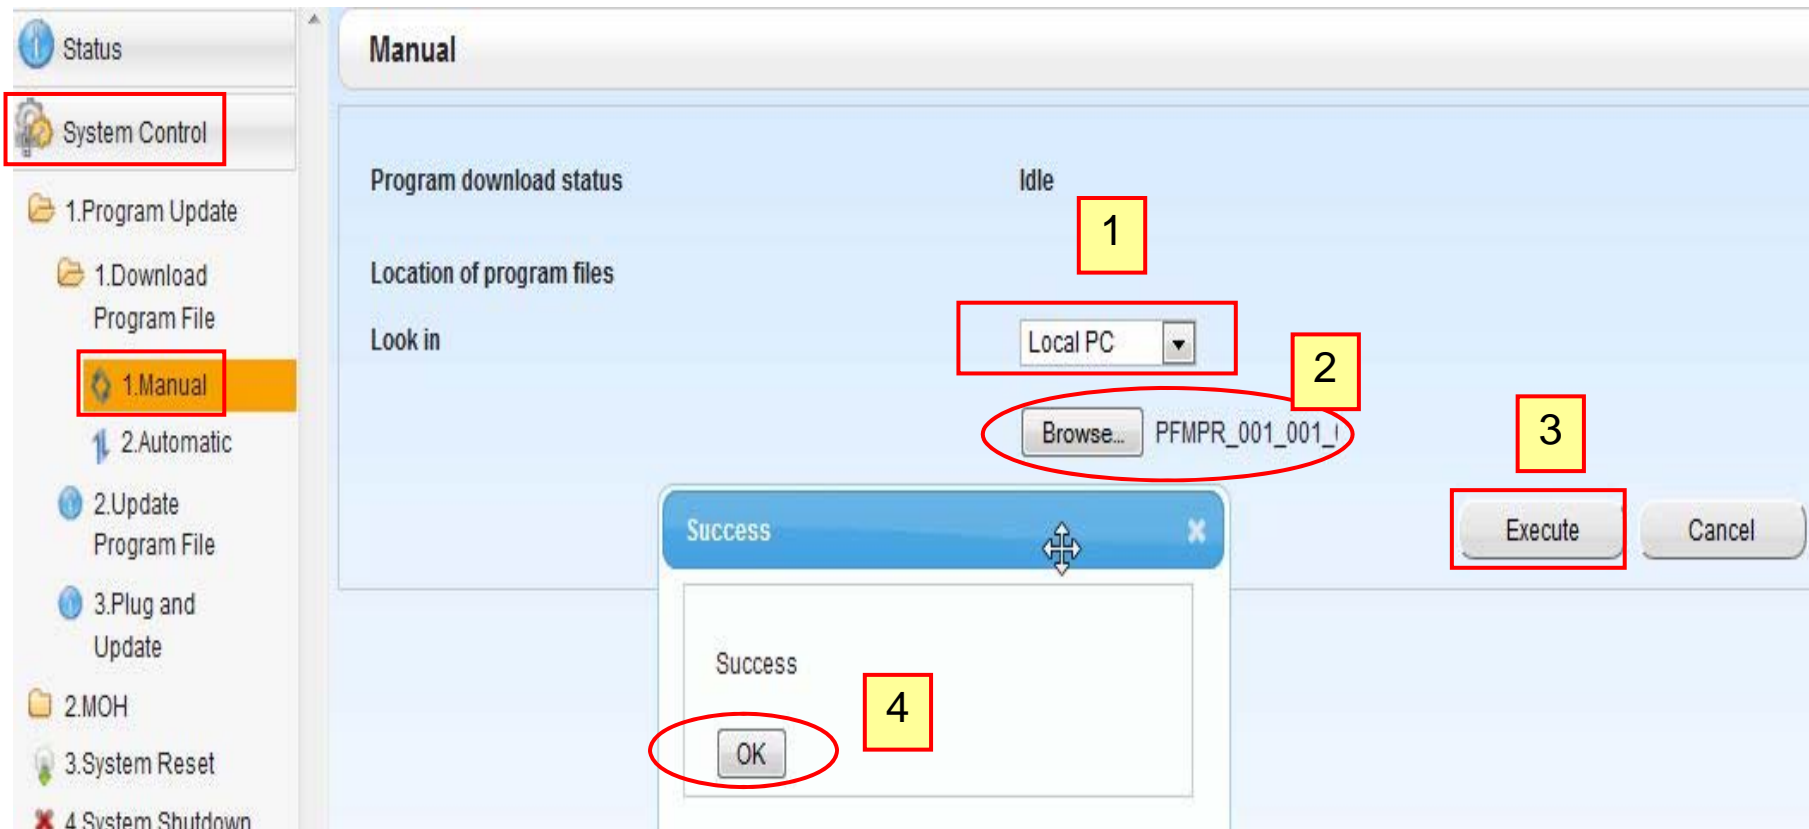

*** ต้องเสียบ USB Flash Drive ที่ PBX ด้วย *** (FAT32)

การ Up Version PBX



System Control – 1. Program Update – 2. Update Program File

System Control

- Program Update
- 1. Download Program File
- 1. Manual
- 2. Automatic
- 2. Update Program File**
- 3. Plug and Update
- MOH
- System Reset
- System Shutdown
- ol
- ility

Program update type

Immediately **1**

Timed Update

Update Cancel

Email notification

Email Address 1

Email Address 2

NS300

Update Time Local Time

Available Program File (s)

Program	Port Type	File name	File size	Timestamp	Version	Revision
NS300	NS300	PFMPR	81578322	2014-06-02 16:16:04	001.001	630

Page 1 of 1 20 View 1-1 of 1

Select the target to update

<input type="checkbox"/>	Shelf	Slot	Port	Card Type	Port Type	Telephone Type	Version	Revision
<input checked="" type="checkbox"/> 2		MainUnit	-	NS300	NS300	None	001.001	630

Version ที่จะ update

Version เดิม

3

4 Execute Apply

หมายเหตุ หลังจากกดปุ่ม "Execute" จะต้องรอประมาณ 15 นาที จนกว่า PBX จะทำงานเอง ห้ามปิด PBX เด็ดขาด เพราะจะทำให้ PBX ไม่สามารถใช้งานได้

การ Up Version Card (LPR)



System Control – 1. Program Update – 1. Download Program File – 1. Manual

Manual

Program download status: Idle

Location of program files

Look in: Local PC

Browse... PDHLC2_001_000

Execute

ทำขั้นตอนเช่นเดียวกับการ Up Version PBX

การ Up Version Card (LPR)



System Control – 1. Program Update – 2. Update Program File

Program Update

1.Download Program File

1.Manual

2.Automatic

2.Update Program File

3.Plug and Update

MOH

System Reset

System Shutdown

rol

ility

Immediately

Timed Update

Update Cancel

Email notification

Email Address 1

Email Address 2

NS300

Update Time

00:00

Local Time

2014-06-03 09:15:04

Available Program File (s)

Program	Port Type	File name	File size	Timestamp	Version	Revision
NS300	NS300	PFMPR	81578322	2014-06-02 16:16:04	001.001	630
DHLC(DLC)	-	PDHLC2	706428	2014-06-03 09:13:49	001	000

Page 1 of 1 | 20 | View 1-2 of 2

Select the target to update

<input type="checkbox"/>	Shelf	Slot	Port	Card Type	Port Type	Telephone Type	Version	Revision
<input type="checkbox"/>	-	MainUnit	-	NS300	NS300	None	001.001	630
<input checked="" type="checkbox"/>	1	6	-	DHLC4	-	None	001	000